

Z Bond 333

General Purpose Silicone



Glazing and Facade

Description

One component, non-flowing, acetic cure, medium modulus, RTV silicone.

Areas of Application

- Glass, aluminium, glazed ceramics
- Wood, vitreous enamel, fibreglass
- Laminated surfaces, walls, benches etc.
- Terrariums, display cases and general glazing

Special Features

- Strong adhesion to glass and anodised aluminium
- Will maintain its elasticity in extreme environments

Technical Data

System: one component

Packaging: 300g cartridge

Application temperature: -10° C to +40° C




Service temperature: -50° C to +150° C

Skin time: 6 mins

Storage: store in cool dry conditions below 25° C

Colour(s): Translucent, Black

Limitation(s): Do not use on soft metal or masonry.

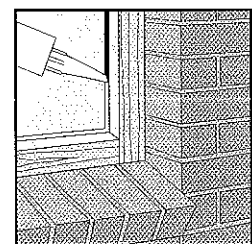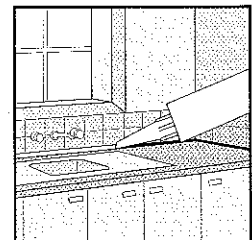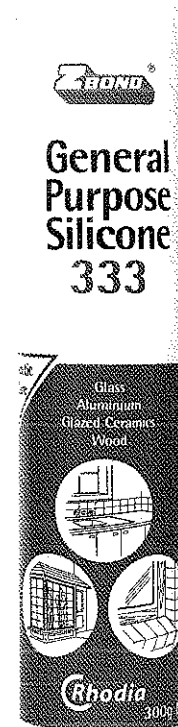

• Detailed Technical Data Sheet and Material Safety Data Sheet are available on request

